

Signal Booster Installation Guide



In-Building
Wireless
Smart Technology™
Signal Booster

Contents:

Antenna Options and Accessories	1
Before Getting Started / How It Works	2
Installation Overview	3
Installing a Wilson Electronics Outside Antenna	4
Installing a Wilson Electronics Inside Antenna	5
Installing a Wilson Electronics Signal Booster.	6
Powering Up a Wilson Electronics Signal Booster	7
Understanding the Signal Booster Lights	8-10
Warnings and Recommendations	11
Factor Conversions	12
Distance Coverage Chart	13
Guarantee and Warranty	14
Signal Booster Specifications	Back Cover

Appearance of device and accessories may vary.

Note: This manual contains important safety and operating information. Please read and follow the instructions in this manual. Failure to do so could be hazardous and result in damage to your signal booster.

Installation Instructions for the Following Wilson Electronics Signal Boosters:

In-Building Wireless Cellular 50 dB Smart Technology™ Signal Booster
Model # 801105

FCC ID: PWO8011SB IC: 4726A-8011SB

In-Building Wireless Cellular 60 dB Smart Technology™ Signal Booster
Model # 801106 & 801108

FCC ID: PWO8011SB IC: 4726A-8011SB

In-Building Wireless PCS 60 dB Smart Technology™ Signal Booster

Model # 801306 FCC ID: PWO8013SB IC: 4726A-8013SB

Model # 801365 FCC ID: PWO8013SB Not for sale in Canada

In-Building Wireless iDEN 50 dB Smart Technology™ Signal Booster

Model # 804005

FCC ID: PWO8040SB IC: 4726A-8040SB

In-Building Wireless iDEN 60 dB Smart Technology™ Signal Booster

Model # 804006

FCC ID: PWO8040SB IC: 4726A-8040SB

In-Building Wireless EGSM 900 MHz 60 dB Smart Technology™ Signal Booster

Model # 801506 FCC ID: PWO274106SB IC: 4726A-274106SB

Model # 801606 Not for sale in U.S. and Canada


In-Building Wireless 800 MHz 70 dB Smart Technology™ Signal Booster

Model # 801170 & 801370 Not for sale in the U.S. and Canada.

Model # 801176 FCC ID: PWO8011SB Not for sale in Canada

The term "IC" before the radio certification number only signifies that Industry Canada technical specifications were met.

Antenna Options & Accessories

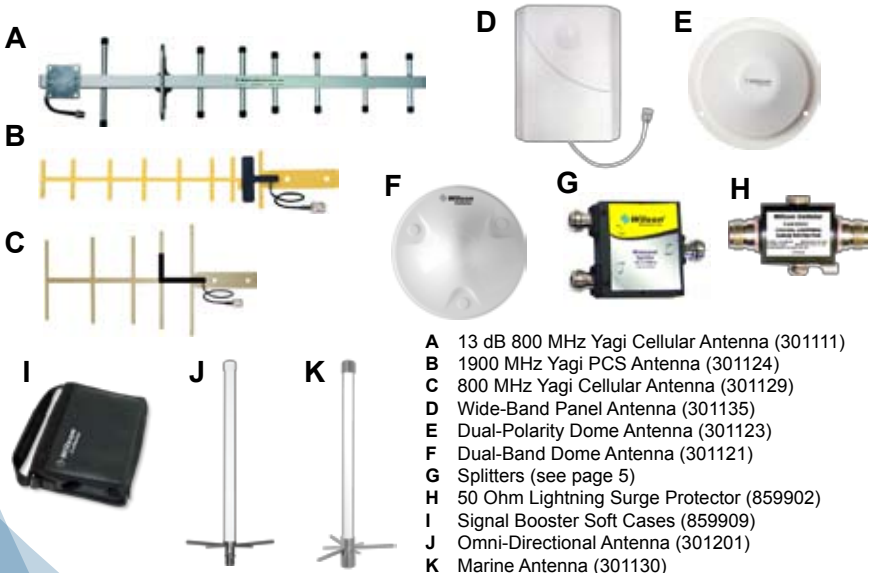

A 13 dB 800 MHz Yagi Cellular Antenna (301111)

B 1900 MHz Yagi PCS Antenna (301124)

C 800 MHz Yagi Cellular Antenna (301129)

D Wide-Band Panel Antenna (301135)

E Dual-Polarity Dome Antenna (301123)

F Dual-Band Dome Antenna (301121)

G Splitters (see page 5)

H 50 Ohm Lightning Surge Protector (859902)

I Signal Booster Soft Cases (859909)

J Omni-Directional Antenna (301201)

K Marine Antenna (301130)

Appearance of device and accessories may vary.

1

Contact Wilson Electronics Technical Support Team with any questions at 866-294-1660
or email: tech@wilsonelectronics.com. Hours: 7 am to 6 pm MST.

Before Getting Started

This guide will help you properly install Wilson Electronics In-Building Wireless Smart Technology™ Signal Boosters. **It is important to read through all of the installation steps for your particular application prior to installing any equipment.** Read through the instructions, visualize where all the equipment will need to be installed and do a soft installation before mounting any equipment. If you do not understand the instructions in full, seek professional help, or contact Wilson Electronics Technical Support at 866-294-1660.

Inside this Package



In-Building Wireless
Signal Booster



AC/DC power supply
(sold separately in 801175)

Additional Required Equipment (sold separately)

- Outside Antenna (Yagi recommended)
- Inside dome, panel or low-profile antenna
- Antenna cable

How it Works

Wilson Electronics Signal Boosters are small, portable, bi-directional devices that deliver service levels consistent with what would be expected in areas of high cell network coverage. They amplify a weak or shadowed signal in mobile, marine and in-building applications.

When using a Wilson Electronics Signal Booster in conjunction with Wilson Electronics antennas, the Outside Antenna will collect the cell tower signal and send it through the cable to the Signal Booster. The signal is then amplified and transmitted from the Inside Antenna to the surrounding area. Cell phones and cellular data cards in that area then communicate with the improved signal. When a cell phone or cellular device transmits, the signal is received by the Inside Antenna, amplified by the Signal Booster and transmitted back to the cell tower through the Outside Antenna.

Installation Overview

The following steps provide a summary of the Signal Booster/antenna installation process. However, they are **not** a substitute for the complete installation instructions on the following pages, which you should read thoroughly. Contact Wilson Electronics Technical Support Department with any questions at 866-294-1660.

STEP 1: Install the Outside Antenna

Mount the Yagi antenna so that it points toward the cell tower and away from where the Inside Antenna will be located. Depending on your Signal Booster model, the two antennas will need 50-75 feet of separation (see illustrations on pages 5 and 6). Lightning Surge Protection is recommended for all in-building installations (see page 6).

STEP 2: Install the Inside Antenna

Select a location in the center of where the signal needs to be amplified. Refer to the instructions included with the Inside Antenna. (See illustration on page 5.)

STEP 3: Install the Signal Booster

Position the Signal Booster in a well-ventilated location near a power outlet. Attach the Outside and Inside Antennas to the Signal Booster using Wilson 400 low loss cable (available from Wilson Electronics). See page 6 for more information.

STEP 4: Power up the Signal Booster

IMPORTANT! Before connecting the power supply, ensure that both the Inside and Outside Antenna cables are connected. Also ensure that all cell phones and cellular data cards within 50 feet of the Inside Antenna are turned off. Plug in the supplied power supply into the Signal Booster and then into a AC power strip (power supply sold separately in 801175). See page 7 for more information. Wilson Electronics recommends that all AC power supplies for home electronics be plugged into a AC Power Strip with at least a **1000 Joule** rating.


STEP 5: Check the Signal Booster Lights

The PWR light should be green, indicating that the Signal Booster has power. If all other lights are also green, the Signal Booster is operating properly; however, if you do not have the desired signal coverage area, refer to pages 5, 6, 8, 9 and 10.

Note: *If you are using an outdoor Yagi Antenna, it must be adjusted for maximum signal.*


Installing a Wilson Electronics Outside Antenna

Select a location on the roof of the building to install the Outside Antenna. Take extreme care to ensure neither you nor the antenna come in contact with any electrical power lines. Using a cell phone in test mode to find the strongest signal from the cell tower. For test mode help, visit www.WilsonElectronics.com or call Technical Support at 866-294-1660. Follow the specific antenna installation instructions included with the Outside Antenna.

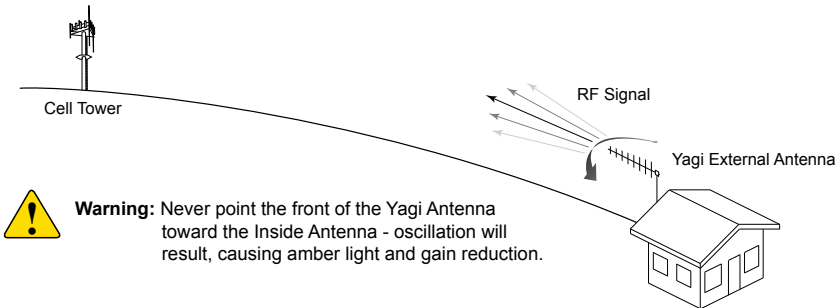

A Yagi Antenna must be installed horizontally with the elements vertical and the drip hole on the bottom. Ensure there is three feet of clearance in all directions surrounding the antenna.

CORRECT



NOT CORRECT




Warning: The Outside Antenna must be installed on an outdoor permanent structure with a separation of at least 20 feet from all persons during normal operation.

Installing Lightning Protection

(sold separately)

Install the Lightning Surge Protector (LSP) close to the Signal Booster. Attach the cable from the Outside Antenna to the surge protector, using a short length of low loss cable; attach one end to the LSP and the other to the Outside Antenna connector on the Signal Booster. **Ensure the LSP is properly grounded.** LSP may be purchased at www.WilsonElectronics.com or call 800-204-4104 (part #859902).

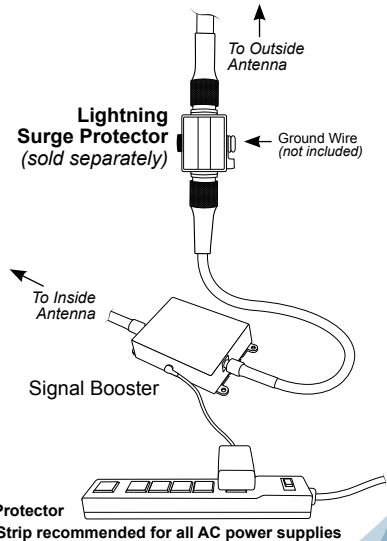

Installing a Wilson Electronics Inside Antenna

Select a suitable location for the Inside Antenna, preferably in the center of where the signal needs to be amplified. To determine signal strength and coverage distance, refer to page 12 of this installation guide.

Follow the specific antenna installation instructions included with the Inside Antenna.


Wilson Electronics has several Inside Antenna options. The dome and Panel Antennas are the most popular for in-building applications.

For a square room, a Dome Antenna will provide better coverage. (A)

For a rectangular room, a Panel Antenna will provide better coverage. (B)

In some cases, multiple Inside Antennas may be required (C & D). A signal may be "split" by using a splitter. If using more than one Inside Antenna, a separation of at least 20 feet is necessary between Inside Antennas.

○ = Dome Antenna ■ = Signal Booster
□ = Panel Antenna □ = Splitter

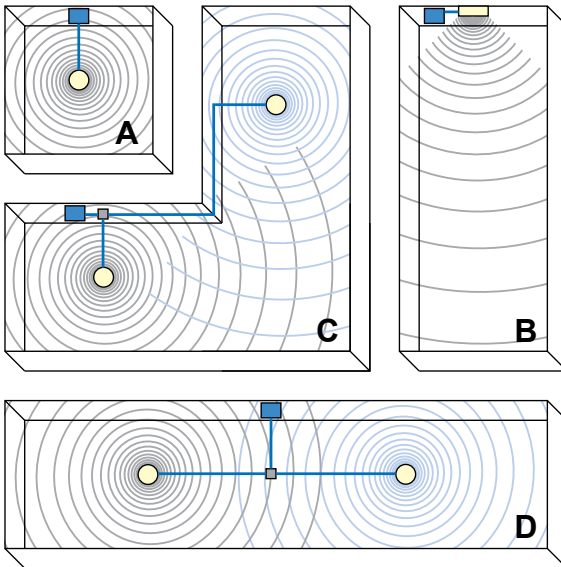

Splitter Options:

(sold separately)



2-way
(859957)

3-way
(859980)



4-way
(859981)

Connect the cable from the Signal Booster to the Inside Antenna. For distances of 20 feet or more, use Wilson 400 low loss cable to prevent significant signal loss.

⚠ Warning: An Inside Antenna must have a separation distance from all persons that is at least 12 inches for the 5.2 dBi Dome Antenna and 15 inches for the 7 dBi Panel Antenna.


Installing a Wilson Electronics Signal Booster

Select a location to install the Signal Booster that is away from excessive heat, direct sunlight, moisture and that has proper ventilation. Do not place the Signal Booster in an air-tight enclosure.

Recommended installation locations for in-building Signal Boosters are:
In a closet, on a shelf and near a power outlet.

Run the Outside Antenna cable to the Signal Booster and attach it to the connector labeled "Outside Antenna" on the Signal Booster. Run the Inside Antenna cable to the Signal Booster and attach it to the connector labeled "Inside Antenna" on the Signal Booster.

Note: Be careful when plugging the connector in so as not to damage the center pins on the connectors.

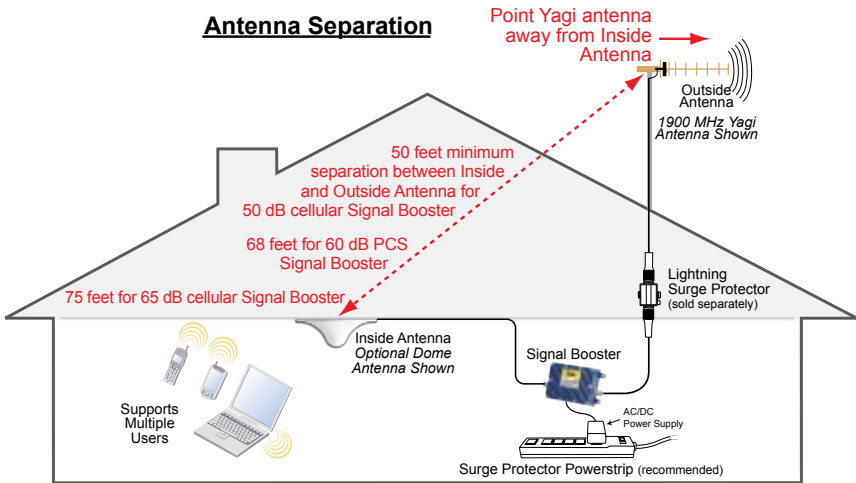

Connect the Outside Antenna to the Signal Booster with Wilson 400 low loss cable (available from Wilson Electronics). Place the Inside Antenna in the center of the area needing the amplified signal. It is important to have at least 50 feet of separation between the Inside and Outside Antennas for the 50 dB Signal Boosters, 68 feet of separation distance for the 60 dB PCS Signal Boosters and at least 75 feet of separation distance for the 65 dB Signal Boosters.


Warning: Connecting the Signal Booster directly to the cell phone with use of an adapter will damage the cell phone.

Warning: Lightning protection is recommended for all installations (sold separately). Take extreme care to ensure that neither you nor the antenna comes near any electric power lines.

Powering up a Wilson Electronics Signal Booster

1. **IMPORTANT!** Ensure that all cell phones and cellular data cards within 50 feet of the Inside Antenna are turned off.
2. To verify proper installation of the Signal Booster and antennas, make sure that the distance between the Inside and Outside Antennas is a minimum of 50 feet for the 50 dB Signal Booster, 68 feet of separation distance for the 60 dB PCS Signal Booster, and 75 feet for the 65 dB cellular Signal Booster.
3. If you are using an outside Yagi Antenna, never point the front of the Yagi toward the Inside Antenna.
4. Ensure that both the Outside Antenna cable and the Inside Antenna cable are connected to the Signal Booster before powering up the Signal Booster.
5. Plug the power supply into the Signal Booster input marked “POWER” (carefully, to avoid damaging the center pin) and then into a AC Power Strip.

IMPORTANT NOTICE



- It is very important to power your Signal Booster using a surge protected AC Power Strip with at least a **1000 Joule rating**.
- Failure to do this will void your warranty in the event of a power surge or lightning strike.



Warning: Use only the power supply provided in this package. Use of a non-Wilson Electronics product may damage your equipment (power supply sold separately in 801175).

Warning: Verify that both the Outside Antenna and the Inside Antenna are connected to the Signal Booster before powering up the Signal Booster.

NOTE: The aluminum casing of a Wilson Electronics Signal Booster will adjust very quickly to the ambient temperature of its environment. For example, in the summer, when the attic of a house can easily exceed 140 degrees Fahrenheit, the Signal Booster temperature may be 10 or more degrees higher. The casing will be hot to the touch. Such high temperatures will not damage the Signal Booster, nor do they pose a fire risk. As recommended in these instructions, install the Signal Booster in a location with adequate ventilation. Keep the area free of items that could block air flow to the Signal Booster.

Understanding the Signal Booster Lights



If your Signal Booster has this light configuration refer to the instructions below.

The Signal Booster is equipped with sensitive electronics designed to detect Signal Booster oscillation or cell phone overload, both of which can hamper Signal Booster performance. The Signal Booster is designed to automatically reduce gain or, if necessary, shut down to prevent or compensate for these conditions. Oscillation or overload can be caused by improper equipment installation -- understanding the Signal Booster lights will help you identify and solve potential problems.



When the Signal Booster is initially powered on, the 60 light will turn green. This indicates the Signal Booster is working at the proper gain level.



If the 50 light is green, an oscillation has been detected and the Signal Booster is powering down. Verify that the outside Yagi Antenna is pointed away from the Inside Antenna and not across the roof of the building. If need be, redirect the Yagi Antenna so that it is pointing away from the Inside Antenna. Then, reset the Signal Booster by disconnecting and reconnecting the power supply.



If the 40 light is green, the Signal Booster is continuing to power down. Try operating the cell phone farther away from the Inside Antenna. If need be, redirect the Yagi Antenna so that it is pointing away from the Inside Antenna. Then, reset the Signal Booster by disconnecting and reconnecting the power supply.



If the OSC light is solid red, the Signal Booster has shut down to prevent oscillation. Try operating the cell phone farther away from the Inside Antenna. Verify that the outside Yagi Antenna is pointed away from the Inside Antenna and not across the roof of the building. If need be, redirect the Yagi Antenna so that it is pointing away from the Inside Antenna. Then, reset the Signal Booster by disconnecting and reconnecting the power supply.



If the OSC light is blinking red, the Signal Booster has shut down to prevent a receive overload. Try moving the Outside Antenna farther away from the cell tower.

Understanding the Signal Booster Lights



If your Signal Booster has this light configuration refer to the instructions below.

The Signal Booster is equipped with sensitive electronics designed to detect Signal Booster oscillation or cell phone overload, both of which can hamper Signal Booster performance. The Signal Booster is designed to automatically reduce gain or, if necessary, shut down to prevent or compensate for these conditions. Oscillation or overload can be caused by improper equipment installation, understanding the Signal Booster lights will help you identify and solve potential problems.



When the Signal Booster is initially powered on, the 65 light will turn green. This indicates the Signal Booster is working at the proper gain level.



If the 55 light is green, an oscillation has been detected and the Signal Booster is powering down. Verify that the outside Yagi Antenna is pointed away from the Inside Antenna and not across the roof of the building. If need be, redirect the Yagi Antenna so that it is pointing away from the Inside Antenna. Then, reset the Signal Booster by disconnecting and reconnecting the power supply.



If the 45 light is green, the Signal Booster is continuing to power down. Try operating the cell phone farther away from the Inside Antenna. If need be, redirect the Yagi Antenna so that it is pointing away from the Inside Antenna. Then, reset the Signal Booster by disconnecting and reconnecting the power supply.



If the OSC light is solid red, the Signal Booster has shut down to prevent oscillation. Try operating the cell phone farther away from the Inside Antenna. Verify that the outside Yagi Antenna is pointed away from the Inside Antenna and not across the roof of the building. If need be, redirect the Yagi Antenna so that it is pointing away from the Inside Antenna. Then, reset the Signal Booster by disconnecting and reconnecting the power supply.



If the OSC light is blinking red, the Signal Booster has shut down to prevent a receive overload. Try moving the Outside Antenna farther away from the cell tower.

Understanding the Signal Booster Lights



If your Signal Booster has this light configuration refer to the instructions below.

The Signal Booster is equipped with sensitive electronics designed to detect Signal Booster oscillation or cell phone overload, both of which can hamper Signal Booster performance. The Signal Booster is designed to automatically reduce gain or, if necessary, shut down to prevent or compensate for these conditions. Oscillation or overload can be caused by improper equipment installation -- understanding the Signal Booster lights will help you identify and solve potential problems.



The power light will turn green when the Signal Booster is initially powered on.



A **BLINKING** red light indicates a cell tower overload. Move the Outside Antenna farther away from the cell tower.



When the D light is green, the Signal Booster is working at proper gain level (peak performance).



If light C is green but D is out, an oscillation has been detected and the Signal Booster is powering down. To remedy this, turn the Outside Antenna slightly away from the Inside Antenna until the D light turns green.









If light B is green and C and light D are off, an oscillation has been detected and the Signal Booster is powering down. To remedy this, turn the Outside Antenna slightly away from the Inside Antenna until the D light turns green.



If light A is solid red, the Signal Booster has shut down to prevent an oscillation. To remedy this, turn the Outside Antenna slightly away from the cell tower. The Signal Booster will reset automatically but may also be reset by disconnecting and reconnecting the power supply.

Warnings and Recommendations

-  **Warning:** The Yagi Antenna must always be located so the back or side points to the Inside Antenna. Never point the front of the Yagi Antenna toward the Inside Antenna – oscillation will result, causing a red light and gain reduction.
-  **Warning:** The Outside Antenna must be installed on an outdoor permanent structure with a separation of at least 20 feet from all persons during normal operation.
-  **Warning:** Connecting the Signal Booster directly to the cell phone with use of an adapter will damage the cell phone.
-  **Warning:** Connect both the Outside and Inside Antenna cables to the Signal Booster before powering up the Signal Booster.
-  **Warning:** Use only the power supply provided in this package. Use of a non-Wilson Electronics product may damage your equipment.
-  **Warning: RF Safety:** An Inside Antenna must have a separation distance from all persons that is at least 12 inches for the 5.2 dBi dome antenna and 15 inches for the 7 dBi panel Antenna.

Lightning protection is recommended for all in-building installations.

Finding Signal Strength and Calculating Coverage Distance

Signal strength and the corresponding coverage distance you can expect to achieve with your Signal Booster/antenna system are based on a combination of several factors: the received signal strength of your cell phone alone, the signal gain achieved by your Signal Booster and antennas and the signal loss from cables, taps and splitters you may be using.

To calculate your approximate signal coverage distance, you can enter this information into our Coverage Area Calculator on the Technical Support page on our website www.WilsonElectronics.com. If you prefer, you can manually calculate your approximate signal coverage distance using the instructions below and on the following two pages.

First, measure the Outside Signal Level (OSL) at the intended Outside Antenna location using a cell phone in test mode. (For assistance, visit the Phone Test Modes section on the Technical Support page on our website or call 866-294-1660.) The OSL will always be a negative number. (Even if the cell phone shows a positive number, you will need to change it to a negative for this calculation). Maximum signal strength is usually about -50. When the signal weakens to about -100 or worse, the call may be dropped.

Depending on the model, your Signal Booster gain (AG) will be 50, 60 or 65 dB (see the label on your Signal Booster or the specification table on the back cover of this guide). Your Inside and Outside Antennas will also add signal gain, again depending on the antenna models you are using (see the table on page 12).

You will also experience some signal loss from cables, splitters and taps used to connect your system (see the table on page 13).

Factor Conversions

Using the table below, find and circle the appropriate decibel (dB) numbers that correspond to the equipment in your particular system. Be sure to choose your numbers from the appropriate frequency column based on the service you receive (iDEN, Cellular or PCS).

	Frequency		
	iDEN 851	Cellular 869	PCS 1930
Antenna Factor (AF)			
Low Profile (inside)	+3 dB	+3 dB	+3 dB
Dual-Band Panel (inside)	+7 dB	+7 dB	+7 dB
Dual-Band Dome (inside)	+2 dB	+2 dB	+2 dB
Dual-Polarity Dome (inside)	+5 dB	+5 dB	+5 dB
Yagi 806-939 MHz Cellular (outside)	+13 dB	+13 dB	+13 dB
Yagi 800-900 MHz Cellular (outside)	+10 dB	+10 dB	+10 dB
Yagi 1800-1900 MHz PCS (outside)	+14 dB	+14 dB	+14 dB
Cable Factor (CF)			
20' RG 58	-4 dB	-4 dB	-7 dB
20' Wilson 400	-3 dB	-3 dB	-4 dB
30' Wilson 400	-3 dB	-3 dB	-5 dB
50' Wilson 400	-4 dB	-4 dB	-7 dB
100' Wilson 400	-7 dB	-7 dB	-10 dB
Splitter Factor (SF)	-3 dB	-3 dB	-3 dB
Tap Factor (TF) (depends on model - refer to tap label)	-6/-10 dB	-6/-10 dB	-6/-10 dB

Use the following formula to calculate your Signal Strength (S). Write in your numbers as appropriate. Be sure to account for the length of **all** cable, inside and out. Add up the numbers for **all** taps and/or splitters (if you are not using any, enter 0). Remember, AG and AF will be positive numbers; OSL, CF, TF, SF and S will be negative.

$$\underline{\hspace{1cm}} \quad + \quad \underline{\hspace{1cm}} \quad + \quad \underline{\hspace{1cm}} \quad + \quad \underline{\hspace{1cm}} \quad + \quad \underline{\hspace{1cm}} \quad + \quad \underline{\hspace{1cm}} \quad = \quad \underline{\hspace{1cm}}$$

OSL + AG + AF + CF + SF + TF = S

Once you have calculated your signal strength, use the graph on the following page to determine approximate coverage distance. See below for a sample calculation.

Sample Signal Strength and Coverage Calculation


This example assumes an OSL of -90, use of a 60 dB Cellular Signal Booster, an 806-939 MHz Yagi Antenna and a low profile Inside Antenna with 100 total feet of inside and outside 9913 cable with no splitters or taps.

OSL	-90 (always a negative number) found on cell phone in test mode
AG	+60 gain
AF	+16 dB gain (+13 dB for the Yagi Antenna and +3 dB for the low-profile antenna)
CF	-7 dB loss
SF	0 (none used)
TF	0 (none used)

$$\text{Formula: } -90 + 60 + 16 + -7 + 0 + 0 = -21$$

With a signal strength of -21, coverage distance would be approximately 120 feet from the Inside Antenna.

Inside Building Coverage Distance

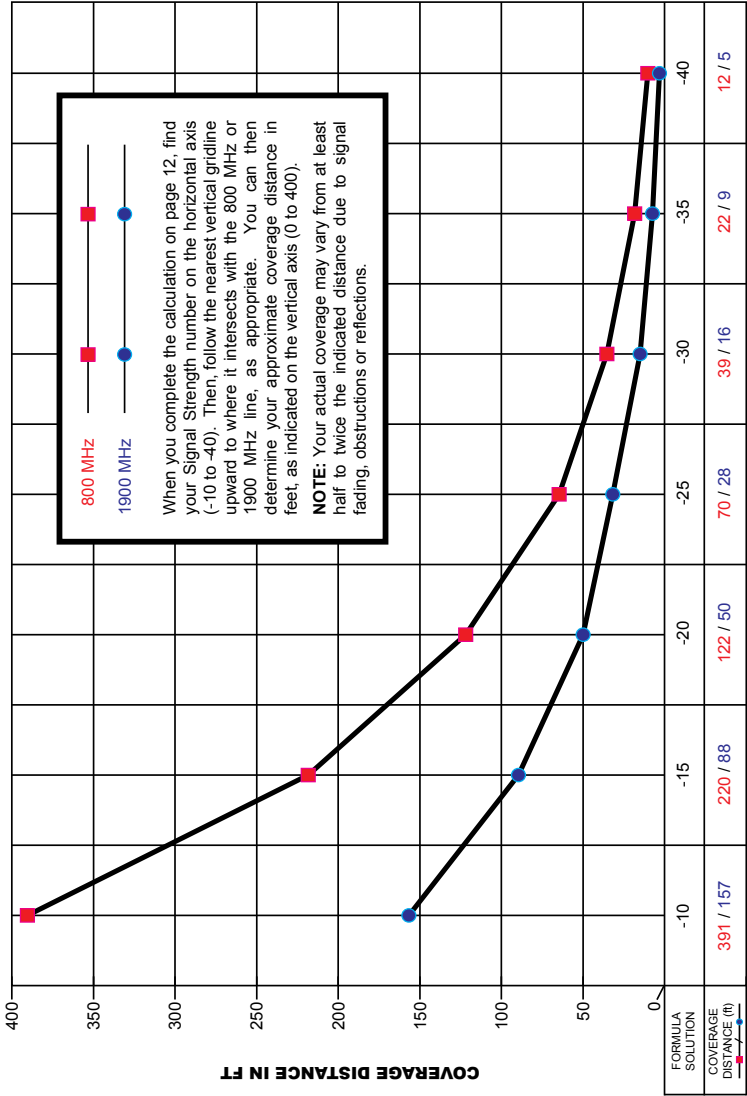

30-Day Money-Back Guarantee

All Wilson Electronics products are protected by Wilson Electronics 30-day money-back guarantee. If for any reason the performance of any product is not acceptable, simply return the product directly to the reseller with a dated proof of purchase.

1-Year Warranty

Wilson Electronics Signal Boosters are warranted for one (1) year against defects in workmanship and/or materials. Warranty cases may be resolved by returning the product directly to the reseller with a dated proof of purchase.

Signal Boosters may also be returned directly to the manufacturer at the consumer's expense, with a dated proof of purchase and a Returned Material Authorization (RMA) number supplied by Wilson Electronics. Wilson Electronics shall, at its option, either repair or replace the product. Wilson Electronics will pay for delivery of the repaired or replaced product back to the original consumer within the continental United States.

This warranty does not apply to any Signal Boosters determined by Wilson Electronics to have been subjected to misuse, abuse, neglect, or mishandling that alters or damages physical or electronic properties.

Failure to use a surge protected AC Power Strip with at least a 1000 Joule rating will void your warranty.

RMA numbers may be obtained by phoning Technical Support at 866-294-1660.

This device complies with Part 15 of FCC rules. The transaction is subject to two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. Changes or modifications not expressly approved by Wilson Electronics could void the authority to operate this equipment.

Disclaimer: The information provided by Wilson Electronics, Inc. is believed to be complete and accurate. However, no responsibility is assumed by Wilson Electronics, Inc. for any business or personal losses arising from its use, or for any infringements of patents or other rights of third parties that may result from its use.

Copyright © 2012 Wilson Electronics, Inc. All rights reserved.

One or more of the following U.S. Patent numbers may apply to the Signal Booster in this product – D596,614; D596,615; D563,381; 7,729,669; 7,486,929; 7,729,656; 7,409,186; 7,783,318; 7,684,838; 12,714,994.



3301 East Deseret Drive, St. George, UT 84790

For additional Technical Support visit www.WilsonElectronics.com
or email at: tech@wilsonelectronics.com

Phone: 866-294-1660 Local: 435-673-5021 Fax: 435-656-2432
www.twitter.com/WilsonCellular www.facebook.com/WilsonCellular

Contact Wilson Electronics Technical Support Team with any questions at 866-294-1660
or email: tech@wilsonelectronics.com. Hours: 7 am to 6 pm MST.

In-Building Wireless Signal Booster Specifications (GSM & Cellular)

Model/Part Number	Cellular # 801105/801175	Cellular # 801106	Cellular #801108	Cellular #801110	Cellular #801165
Frequency					
Uplink	824-849 MHz	824-849 MHz	824-835 MHz	835-849 MHz	824-849 MHz
Downlink	869-894 MHz	869-894 MHz	869-880 MHz	880-894 MHz	869-894 MHz
Gain	50 dB	60 dB	Channel A 60 dB	Channel B 60 dB	65 dB
Max Output	3 watts				
AGC Limit (uplink)	+ 30 dBm				
Noise Figure	3-4 dB typical				
Flatness (uplink/downlink)	± 2.5 dB				
Isolation (uplink/downlink)	> 90 dB				
Power Requirements	Input: 100-240 V AC 50/60 Hz 0.6 A / Output: 6 V DC 3 A				
Connectors	N-Female 50 ohms				
Dimensions	5.6 x 3.6 x 1.7 (inch) / 14.2 x 9.1 x 4.4 (cm)				
Weight	1.5 lbs / .7kg				

In-Building Wireless Signal Booster Specifications (iDEN, PCS, EGSM & DCS)

Model/Part Number	iDEN # 804005	iDEN # 804006	PCS # 801306	PCS # 801365	EGSM #801506	DCS #801606
				Not for sale in Canada		Not for sale in the U.S. or Canada
Frequency						
Uplink	806-821 MHz	806-821 MHz	1850-1910 MHz	1850-1910 MHz	880-915 MHz	1710-1755 MHz
Downlink	851-866 MHz	851-866 MHz	1930-1990 MHz	1930-1990 MHz	925-960 MHz	1805-1880 MHz
Gain	50 dB	60 dB	60 dB	65 dB	60dB	60dB
Max Output	3 watts		2 watts		3 watts	
AGC Limit (uplink)	+ 30 dBm		+30 dBm			
Noise Figure	3-4 dB typical		4 dB typical		3 dB typical	
Flatness (uplink/downlink)	± 2.5 dB		± 4 dB			
Isolation (uplink/downlink)	> 90 dB					
Power Requirements	Input: 100-240 V AC 50/60 Hz 0.6 A / Output: 6 V DC 3 A					
Connectors	N-Female 50 ohms					
Dimensions	5.6 x 3.6 x 1.7 (inch) / 14.2 x 9.1 x 4.4 (cm)					
Weight	1.5 lbs / 0.7 kg					

The Manufacturer's rated output power of this equipment is for single carrier operation. For situations when multiple carrier signals are present, the rating would have to be reduced by 3.5 dB, especially where the output signal is re-radiated and can cause interference to adjacent band users. This power reduction is to be by means of input power or gain reduction and not by an attenuator at the output of the device.